

Transceiver Single Channel Module

17-21 & 27-31 GHz



Product Datasheet

TR1000

Single channel satellite communications transceiver module for K/Ka-band.

Overview

The TR1000 transceiver module enables direct interface with a modem or Software Defined Radio (SDR) enabling full-function Ka-band satellite systems.

The module is a complete RF satellite system that allows spacecraft designers a fast, reliable and cost effective means of implementing high data-rate Ka-band payloads. Additional channels can be added in both the transmit and receive paths to accommodate to specific customer requirements.

The RF outputs and inputs are standard waveguide flanges for high reliability and low loss antenna connections. In order to maximize data rates, the transmitter has an output monitoring function that enables precise amplitude stability when coupled with external pre-distortion or gain control systems.



Dimensions: 180 L x 130 W x 87 H (mm)
Weight: 2.2 (KG)



Features

- Single channel transmit and receive satellite communications transceiver with option to extend for dual channel right and left circular polarization
- TX output frequency 17-21 GHz
- RX input frequency 27-31 GHz
- Receiver noise 3 dB typical
- 10 W transmitter power
- Transmitter feedback for digital pre-distortion
- Programmable transmitter gain
- DC power 28 W



Applications

- High speed data communications
- Space communications
- IOT
- Security
- 5G


Transceiver Single Channel Module

17-21 & 27-31 GHz



Product Datasheet

Simplified Block Diagram

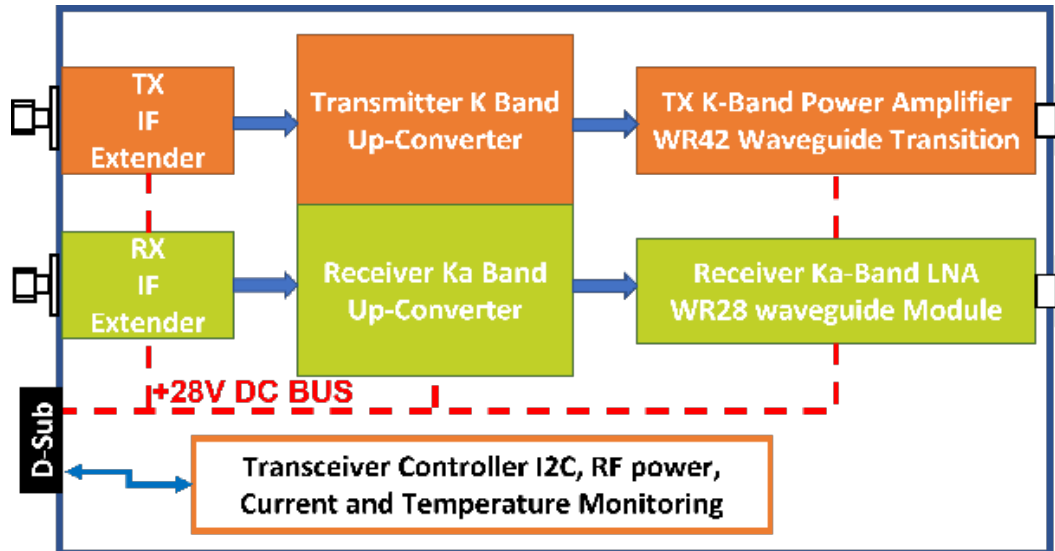

Operational Data

Transmitter (TX)

Notes

All tests carried out at 25 °C

Parameter	Rating
TX Output Frequency Range	17-21 GHz (band filter dependant)
IF Input Frequency Range (programmable)	1-5 GHz
IF Input Power	-10 dBm (max)
TX Output Power	10 W CW
Small Signal Gain	75 dB \pm 1 dB
Programmable Gain adjustment	33 dB
Gain Flatness	\pm 3 dB over 800 MHz bandwidth (needs measured)
ACPR	<-28 dBc typical (needs measured)
Operating Temperature	-40 °C to +85 °C
Supply Voltage Range	25-28 V

Transmitter Power Sensor

Parameter	Rating
IF Input Power Sensor Reading Accuracy	\pm 0.1 dB
TX Power Amplifier Sensor Reading Accuracy	\pm 0.2 dB

Transceiver Single Channel Module

17-21 & 27-31 GHz



Product Datasheet

Operational Data

TX Phase Noise

Notes

All tests carried out at 25 °C

Parameter	Phase Noise Power
10 Hz	-35 dBc
100 Hz	-55 dBc
1 kHz	-65 dBc
10 kHz	-75 dBc
100 kHz	-94 dBc
1 MHz	-110 dBc
10 MHz	-120 dBc

TX Monitoring (remotely by GUI interface)

Parameter	Rating
Transceiver Current	Yes
Transceiver Temperature	Yes
Power Amplifier Power	Yes
Input Power Level	Yes
IF Module Current	Yes

TX Control

Parameter	Rating
Power Cycling of TX IF	Yes
Power Cycling of TX Transceiver	Yes
Power Cycling of TX Power Amplifier	Yes
Programmable Gain	Yes

Receiver (RX)

Parameter	Rating
RX Input Frequency Range	27-31 GHz (band filter dependant)
RX IF Output Frequency Range	1 to 5 GHz
RX Gain	70 dB
RX Gain Adjustment	66 dB
RX Gain Adjustment Step Size	0.25 dB
RX IF Output P1dB	>11 dBm
RX IF OIP3	>22 dBm
Noise Figure	3 dB typical

RX Phase Noise

Parameter	Phase Noise Power
10 Hz	-35 dBc
100 Hz	-55 dBc
1 kHz	-65 dBc
10 kHz	-75 dBc
100 kHz	-94 dBc

Transceiver Single Channel Module

17-21 & 27-31 GHz



Product Datasheet

Connectors

IF Baseband Connectors


1 x 50 Ω SMA for TX, VSWR < 1.35:1

1 x 50 Ω SMA for RX, VSWR < 1.35:1

RF Connectors to Antennas

1 x WR42 waveguide for TX, VSWR < 1.35:1

1 x WR28 waveguide for RX, VSWR < 1.35:1

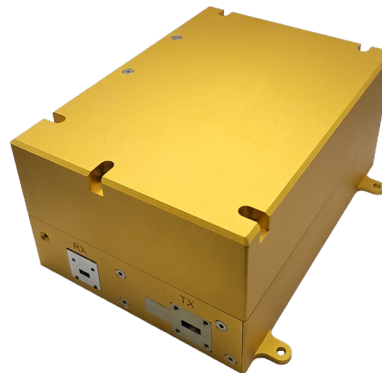

Dimensions: 180 L x 130 W x 87 H (mm)
Weight: 2.2 (KG)

DC Connector, Monitoring and Control Connector

9 way D-sub connector. Other compatible connectors are available.

Control Interface

I2C 3 wire interface (other interfaces are available as an option)

GUI Windows based interface for bench testing

Environmental

Operational temperature range -40 °C to +85 °C

Contact Information

ReliaSat European Offices
sales@reliasat.com
www.reliasat.com

TR1000	Issue Date: 10/07/2023	DOC REV 1	Page 4 of 4
--------	------------------------	-----------	-------------

Information furnished by ReliaSat is believed to be accurate. No responsibility is assumed by ReliaSat for its use, nor for any infringements on the rights of other parties that may result for the use of the information herein. All specifications are subject to change without notice.